

Lifting Eye Nut RUD RM

Produktinformation



Octagonal lifting eye approved for lifting. Lifting with an angle of inclination is allowed with reduction of WLL (see diagram at blueprint) but we strongly recommend using the RUD RM lifting eye only for straight lifting.

Applied harmonized norms: DIN EN ISO 12100: 2011-03


... [Read more](#)

Kennzeichnung: nach Norm, CE-Kennzeichnung
Standard: EN 1677-1

Sicherheitsbeiwert: 4:1
Güteklasse: 8

Lifting Eye Nut RUD RM

Blaupause

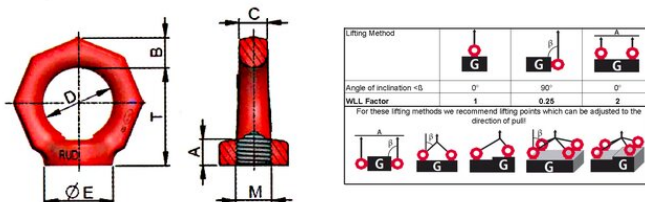

Technische Daten

Artikel-Nr.	Tragfähigkeit t	Gewinde mm	WLL 90° t	A mm	B mm	C mm	D mm	E mm	T mm	Gewicht (kg)
11.4055254	0,4	M6	0,1	12	11	10	25	25	34	0,1
11.4055255	0,8	M8	0,2	12	11	10	25	25	34	0,1
11.4055258	1	M10	0,25	12	11	10	25	25	34	0,1
11.4055271	1,6	M12	0,4	14	13	12	30	30	41	0,2
11.4055281	3	M14	0,75	16	15	14	35	35	48	0,3
11.4055460	3,2	M16	0,8	16	15	14	35	35	48	0,3
11.4055342	4,8	M18	1,2	18	17	16	40	40	55	0,4
11.4055343	6	M20	1,5	18	17	16	40	40	55	0,35
11.4055387	6	M22	1,5	22	21	20	50	50	70	0,65
11.4055394	8	M24	2	22	21	20	50	50	70	0,6
11.4055399	8	M27	2	28	26	24	60	60	85	1,4
11.4055438	12	M30	3	28	26	24	60	60	85	1,3
11.407994437	12	M33	3	37	43	38	90	100	130	5,8
11.4053093	16	M36	4	40	43	38	90	100	130	5,65
11.407904790	20	M39	5	37	43	38	90	100	130	5,65
11.4053095	24	M42	6	40	43	38	90	100	130	5,4
11.4053098	32	M48	8	40	43	38	90	100	130	5,3