


Loading Ramp RRD

Produktinformation

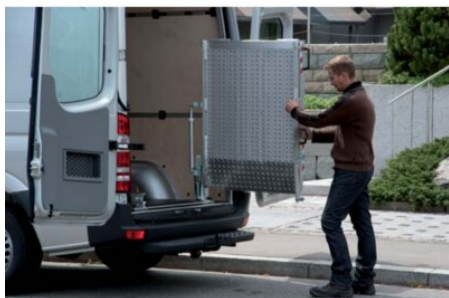

A logical further development of the RRK is the RRD, swivelling, for combined use.

When loading heavy loads, e.g. with sack trucks or wheelie bins, the ramp is used as normal; for frequent in and out, e.g. with parcels or light cardboard boxes, the ramp is swivelled to the side like a door.

If you have a tour with only small, light goods, the ramp is fixed inside the vehicle with a storage bracket.

It remains there securely during the journey.

... [Read more](#)

Loading Ramp RRD

Technische Daten

Artikel-Nr.	Load Capacity t	Länge mm	Width mm	Gewicht (kg)
35130019F	0,45	1.400	800	50
35130021F	0,45	1.600	1.000	53