


## 4 Special Clevis Sub-Assembly GTVK/SUN

---

### Product information

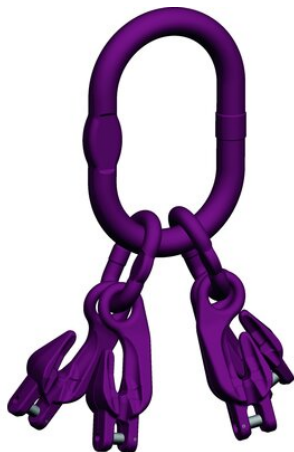

**General:** For 3 and 4-leg slings with shortening element.

[... Read more](#)

---


**Temperature range:** -40 °C up to 200 °C

**Safety factor:** 4:1

**Grade:** 12

## 4 Special Clevis Sub-Assembly GTVK/SUN

### Blueprint



### Technical data

Part code	Code	Chain diameter	WLL ton	EWL ton	can be used with single hook acc. DIN15401 up to nr.	WLL 45- 60° ton	d mm	t mm	w mm	e mm	Weight kg
42060037B	GTVK/SUN 4-7	7	5	368	10	3.55	27	190	110	368	6.35
42060038B	GTVK/SUN 4-8	8	6.3	368	10	4.5	27	190	110	368	6.39
42060017B	GTVK/SUN 4-10	10	10.6	433	12	7.5	30	190	110	433	10.94
42060039B	GTVK/SUN 4-13	13	17	616	12	11.8	38	275	150	616	25.35
42060040B	GTVK/SUN 4-16	16	25.6	658	12	18.3	38	275	150	658	37.17