


4 Special Clevis Sub-Assembly GTKR/SUN

Product information

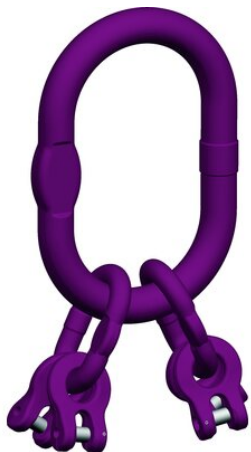

General: For 3 and 4-leg slings with shortening element.

... [Read more](#)


Temperature range: -40 °C up to 200 °C

Safety factor: 4:1

Grade: 12

4 Special Clevis Sub-Assembly GTKR/SUN

Blueprint



Technical data

Part code	Code	Chain diameter	WLL ton	EWL	can be used with single hook acc. DIN15401 up to nr.	WLL 45- 60° ton	dmm mm	t mm	w mm mm	e mm mm	Weight kg
42060051B	GTKR/SUN 4-7	7	5	287	10	3.55	27	190	110	287	4.11
42060052B	GTKR/SUN 4-8	8	6.3	287	10	4.5	27	190	110	287	4.15
42060053B	GTKR/SUN 4-10	10	10.6	326	12	7.5	30	190	110	326	6.62
42060054B	GTKR/SUN 4-13	13	17	479	12	11.8	38	275	150	479	14.27
42060055B	GTKR/SUN 4-16	16	25.6	503	12	18.3	38	275	150	503	21.25