


## Steel Wire Rope verotop S

### Product information



Mobile crane

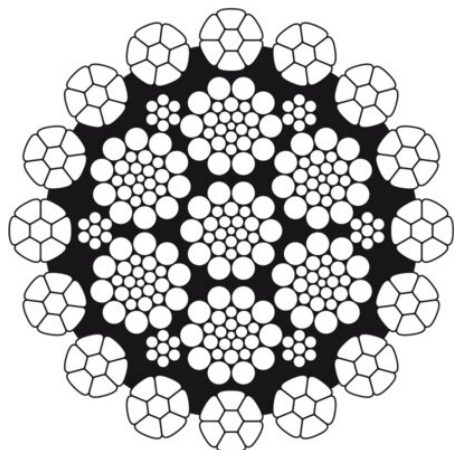

Piling crane



**Wire rope construction:** verotop S is a very flexible rotation-resistant rope with compacted outer strands and very high breaking strength.

#### Features:

- Very strong compacted rotation-resistant rope.
- Achieves very good bending fatigue results.
- Offers excellent resistance to crushing and abrasion.
- Possesses perfect spooling behavior on multilayer drum.

**ISO 4309 Rope Category No:** All Diameters RCN.23-2.

[... Read more](#)

**Marking:** According to standard

**Standard:** EN 12385-4

**Note:** verotop S can be used either with or without swivel.

**Fill factor:** 0.742

**RCN:** 23-2

**Tolerance Ø:** +2% to +4%

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.G37VPS130G | 13               | 1,960                              | Galvanized | zZ       | 166                    | 98                         | SupplierStandard | 85             |
| 01.G47VPS130G | 13               | 1,960                              | Galvanized | sS       | 166                    | 98                         | SupplierStandard | 85             |
| 01.B37VPS130G | 13               | 1,960                              | Bright     | zZ       | 166                    | 98                         | SupplierStandard | 85             |
| 01.B47VPS130G | 13               | 1,960                              | Bright     | sS       | 166                    | 98                         | SupplierStandard | 85             |
| 01.G37VPS130H | 13               | 2,160                              | Galvanized | zZ       | 172.8                  | 98                         | SupplierStandard | 85             |
| 01.G47VPS130H | 13               | 2,160                              | Galvanized | sS       | 172.8                  | 98                         | SupplierStandard | 85             |
| 01.B37VPS130H | 13               | 2,160                              | Bright     | zZ       | 172.8                  | 98                         | SupplierStandard | 85             |
| 01.B47VPS130H | 13               | 2,160                              | Bright     | sS       | 172.8                  | 98                         | SupplierStandard | 85             |
| 01.G37VPS140G | 14               | 1,960                              | Galvanized | zZ       | 192.5                  | 114                        | SupplierStandard | 98             |
| 01.G47VPS140G | 14               | 1,960                              | Galvanized | sS       | 192.5                  | 114                        | SupplierStandard | 98             |
| 01.B37VPS140G | 14               | 1,960                              | Bright     | zZ       | 192.5                  | 114                        | SupplierStandard | 98             |
| 01.B47VPS140G | 14               | 1,960                              | Bright     | sS       | 192.5                  | 114                        | SupplierStandard | 98             |
| 01.G37VPS140H | 14               | 2,160                              | Galvanized | zZ       | 200.4                  | 114                        | SupplierStandard | 98             |
| 01.G47VPS140H | 14               | 2,160                              | Galvanized | sS       | 200.4                  | 114                        | SupplierStandard | 98             |
| 01.B37VPS140H | 14               | 2,160                              | Bright     | zZ       | 200.4                  | 114                        | SupplierStandard | 98             |
| 01.B47VPS140H | 14               | 2,160                              | Bright     | sS       | 200.4                  | 114                        | SupplierStandard | 98             |
| 01.G37VPS150G | 15               | 1,960                              | Galvanized | zZ       | 221                    | 131                        | SupplierStandard | 113            |
| 01.G47VPS150G | 15               | 1,960                              | Galvanized | sS       | 221                    | 131                        | SupplierStandard | 113            |
| 01.B37VPS150G | 15               | 1,960                              | Bright     | zZ       | 221                    | 131                        | SupplierStandard | 113            |
| 01.B47VPS150G | 15               | 1,960                              | Bright     | sS       | 221                    | 131                        | SupplierStandard | 113            |
| 01.G37VPS150H | 15               | 2,160                              | Galvanized | zZ       | 230.1                  | 131                        | SupplierStandard | 113            |
| 01.G47VPS150H | 15               | 2,160                              | Galvanized | sS       | 230.1                  | 131                        | SupplierStandard | 113            |
| 01.B37VPS150H | 15               | 2,160                              | Bright     | zZ       | 230.1                  | 131                        | SupplierStandard | 113            |
| 01.B47VPS150H | 15               | 2,160                              | Bright     | sS       | 230.1                  | 131                        | SupplierStandard | 113            |
| 01.G37VPS160G | 16               | 1,960                              | Galvanized | zZ       | 251.4                  | 150                        | SupplierStandard | 128            |
| 01.G47VPS160G | 16               | 1,960                              | Galvanized | sS       | 251.4                  | 150                        | SupplierStandard | 128            |
| 01.B37VPS160G | 16               | 1,960                              | Bright     | zZ       | 251.4                  | 150                        | SupplierStandard | 128            |
| 01.B47VPS160G | 16               | 1,960                              | Bright     | sS       | 251.4                  | 150                        | SupplierStandard | 128            |
| 01.G37VPS160H | 16               | 2,160                              | Galvanized | zZ       | 261.8                  | 150                        | SupplierStandard | 128            |
| 01.G47VPS160H | 16               | 2,160                              | Galvanized | sS       | 261.8                  | 150                        | SupplierStandard | 128            |
| 01.B37VPS160H | 16               | 2,160                              | Bright     | zZ       | 261.8                  | 150                        | SupplierStandard | 128            |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.B47VPS160H | 16               | 2,160                              | Bright     | sS       | 261.8                  | 150                        | SupplierStandard | 128            |
| 01.G37VPS170G | 17               | 1,960                              | Galvanized | zZ       | 283.8                  | 169                        | SupplierStandard | 145            |
| 01.G47VPS170G | 17               | 1,960                              | Galvanized | sS       | 283.8                  | 169                        | SupplierStandard | 145            |
| 01.B37VPS170G | 17               | 1,960                              | Bright     | zZ       | 283.8                  | 169                        | SupplierStandard | 145            |
| 01.B47VPS170G | 17               | 1,960                              | Bright     | sS       | 283.8                  | 169                        | SupplierStandard | 145            |
| 01.G37VPS170H | 17               | 2,160                              | Galvanized | zZ       | 295.5                  | 169                        | SupplierStandard | 145            |
| 01.G47VPS170H | 17               | 2,160                              | Galvanized | sS       | 295.5                  | 169                        | SupplierStandard | 145            |
| 01.B37VPS170H | 17               | 2,160                              | Bright     | zZ       | 295.5                  | 169                        | SupplierStandard | 145            |
| 01.B47VPS170H | 17               | 2,160                              | Bright     | sS       | 295.5                  | 169                        | SupplierStandard | 145            |
| 01.G37VPS180G | 18               | 1,960                              | Galvanized | zZ       | 318.2                  | 190                        | SupplierStandard | 162            |
| 01.G47VPS180G | 18               | 1,960                              | Galvanized | sS       | 318.2                  | 190                        | SupplierStandard | 162            |
| 01.B37VPS180G | 18               | 1,960                              | Bright     | zZ       | 318.2                  | 190                        | SupplierStandard | 162            |
| 01.B47VPS180G | 18               | 1,960                              | Bright     | sS       | 318.2                  | 190                        | SupplierStandard | 162            |
| 01.G37VPS180H | 18               | 2,160                              | Galvanized | zZ       | 331.3                  | 190                        | SupplierStandard | 162            |
| 01.G47VPS180H | 18               | 2,160                              | Galvanized | sS       | 331.3                  | 190                        | SupplierStandard | 162            |
| 01.B37VPS180H | 18               | 2,160                              | Bright     | zZ       | 331.3                  | 190                        | SupplierStandard | 162            |
| 01.B47VPS180H | 18               | 2,160                              | Bright     | sS       | 331.3                  | 190                        | SupplierStandard | 162            |
| 01.G37VPS190G | 19               | 1,960                              | Galvanized | zZ       | 354.5                  | 212                        | SupplierStandard | 181            |
| 01.G47VPS190G | 19               | 1,960                              | Galvanized | sS       | 354.5                  | 212                        | SupplierStandard | 181            |
| 01.B37VPS190G | 19               | 1,960                              | Bright     | zZ       | 354.5                  | 212                        | SupplierStandard | 181            |
| 01.B47VPS190G | 19               | 1,960                              | Bright     | sS       | 354.5                  | 212                        | SupplierStandard | 181            |
| 01.G37VPS190H | 19               | 2,160                              | Galvanized | zZ       | 369.2                  | 212                        | SupplierStandard | 181            |
| 01.G47VPS190H | 19               | 2,160                              | Galvanized | sS       | 369.2                  | 212                        | SupplierStandard | 181            |
| 01.B37VPS190H | 19               | 2,160                              | Bright     | zZ       | 369.2                  | 212                        | SupplierStandard | 181            |
| 01.B47VPS190H | 19               | 2,160                              | Bright     | sS       | 369.2                  | 212                        | SupplierStandard | 181            |
| 01.G37VPS200G | 20               | 1,960                              | Galvanized | zZ       | 392.8                  | 235                        | SupplierStandard | 200            |
| 01.G47VPS200G | 20               | 1,960                              | Galvanized | sS       | 392.8                  | 235                        | SupplierStandard | 200            |
| 01.B37VPS200G | 20               | 1,960                              | Bright     | zZ       | 392.8                  | 235                        | SupplierStandard | 200            |
| 01.B47VPS200G | 20               | 1,960                              | Bright     | sS       | 392.8                  | 235                        | SupplierStandard | 200            |
| 01.G37VPS200H | 20               | 2,160                              | Galvanized | zZ       | 409                    | 235                        | SupplierStandard | 200            |
| 01.G47VPS200H | 20               | 2,160                              | Galvanized | sS       | 409                    | 235                        | SupplierStandard | 200            |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.B37VPS200H | 20               | 2,160                              | Bright     | zZ       | 409                    | 235                        | SupplierStandard | 200            |
| 01.B47VPS200H | 20               | 2,160                              | Bright     | sS       | 409                    | 235                        | SupplierStandard | 200            |
| 01.G37VPS210G | 21               | 1,960                              | Galvanized | zZ       | 433.1                  | 260                        | SupplierStandard | 221            |
| 01.G47VPS210G | 21               | 1,960                              | Galvanized | sS       | 433.1                  | 260                        | SupplierStandard | 221            |
| 01.B37VPS210G | 21               | 1,960                              | Bright     | zZ       | 433.1                  | 260                        | SupplierStandard | 221            |
| 01.B47VPS210G | 21               | 1,960                              | Bright     | sS       | 433.1                  | 260                        | SupplierStandard | 221            |
| 01.G37VPS210H | 21               | 2,160                              | Galvanized | zZ       | 451                    | 260                        | SupplierStandard | 221            |
| 01.G47VPS210H | 21               | 2,160                              | Galvanized | sS       | 451                    | 260                        | SupplierStandard | 221            |
| 01.B37VPS210H | 21               | 2,160                              | Bright     | zZ       | 451                    | 260                        | SupplierStandard | 221            |
| 01.B47VPS210H | 21               | 2,160                              | Bright     | sS       | 451                    | 260                        | SupplierStandard | 221            |
| 01.G37VPS220G | 22               | 1,960                              | Galvanized | zZ       | 475.3                  | 285                        | SupplierStandard | 243            |
| 01.G47VPS220G | 22               | 1,960                              | Galvanized | sS       | 475.3                  | 285                        | SupplierStandard | 243            |
| 01.B37VPS220G | 22               | 1,960                              | Bright     | zZ       | 475.3                  | 285                        | SupplierStandard | 243            |
| 01.B47VPS220G | 22               | 1,960                              | Bright     | sS       | 475.3                  | 285                        | SupplierStandard | 243            |
| 01.G37VPS220H | 22               | 2,160                              | Galvanized | zZ       | 494.9                  | 285                        | SupplierStandard | 243            |
| 01.G47VPS220H | 22               | 2,160                              | Galvanized | sS       | 494.9                  | 285                        | SupplierStandard | 243            |
| 01.B37VPS220H | 22               | 2,160                              | Bright     | zZ       | 494.9                  | 285                        | SupplierStandard | 243            |
| 01.B47VPS220H | 22               | 2,160                              | Bright     | sS       | 494.9                  | 285                        | SupplierStandard | 243            |
| 01.G37VPS224G | 22.4             | 1,960                              | Galvanized | zZ       | 492.8                  | 290                        | SupplierStandard | 251            |
| 01.G47VPS224G | 22.4             | 1,960                              | Galvanized | sS       | 492.8                  | 290                        | SupplierStandard | 251            |
| 01.B37VPS224G | 22.4             | 1,960                              | Bright     | zZ       | 492.8                  | 290                        | SupplierStandard | 251            |
| 01.B47VPS224G | 22.4             | 1,960                              | Bright     | sS       | 492.8                  | 290                        | SupplierStandard | 251            |
| 01.G37VPS224H | 22.4             | 2,160                              | Galvanized | zZ       | 513.1                  | 290                        | SupplierStandard | 251            |
| 01.G47VPS224H | 22.4             | 2,160                              | Galvanized | sS       | 513.1                  | 290                        | SupplierStandard | 251            |
| 01.B37VPS224H | 22.4             | 2,160                              | Bright     | zZ       | 513.1                  | 290                        | SupplierStandard | 251            |
| 01.B47VPS224H | 22.4             | 2,160                              | Bright     | sS       | 513.1                  | 290                        | SupplierStandard | 251            |
| 01.G37VPS230G | 23               | 1,960                              | Galvanized | zZ       | 519.5                  | 312                        | SupplierStandard | 265            |
| 01.G47VPS230G | 23               | 1,960                              | Galvanized | sS       | 519.5                  | 312                        | SupplierStandard | 265            |
| 01.B37VPS230G | 23               | 1,960                              | Bright     | zZ       | 519.5                  | 312                        | SupplierStandard | 265            |
| 01.B47VPS230G | 23               | 1,960                              | Bright     | sS       | 519.5                  | 312                        | SupplierStandard | 265            |
| 01.G37VPS230H | 23               | 2,160                              | Galvanized | zZ       | 541                    | 312                        | SupplierStandard | 265            |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.G47VPS230H | 23               | 2,160                              | Galvanized | sS       | 541                    | 312                        | SupplierStandard | 265            |
| 01.B37VPS230H | 23               | 2,160                              | Bright     | zZ       | 541                    | 312                        | SupplierStandard | 265            |
| 01.B47VPS230H | 23               | 2,160                              | Bright     | sS       | 541                    | 312                        | SupplierStandard | 265            |
| 01.G37VPS240G | 24               | 1,960                              | Galvanized | zZ       | 565.7                  | 340                        | SupplierStandard | 289            |
| 01.G47VPS240G | 24               | 1,960                              | Galvanized | sS       | 565.7                  | 340                        | SupplierStandard | 289            |
| 01.B37VPS240G | 24               | 1,960                              | Bright     | zZ       | 565.7                  | 340                        | SupplierStandard | 289            |
| 01.B47VPS240G | 24               | 1,960                              | Bright     | sS       | 565.7                  | 340                        | SupplierStandard | 289            |
| 01.G37VPS240H | 24               | 2,160                              | Galvanized | zZ       | 589                    | 340                        | SupplierStandard | 289            |
| 01.G47VPS240H | 24               | 2,160                              | Galvanized | sS       | 589                    | 340                        | SupplierStandard | 289            |
| 01.B37VPS240H | 24               | 2,160                              | Bright     | zZ       | 589                    | 340                        | SupplierStandard | 289            |
| 01.B47VPS240H | 24               | 2,160                              | Bright     | sS       | 589                    | 340                        | SupplierStandard | 289            |
| 01.G37VPS250G | 25               | 1,960                              | Galvanized | zZ       | 613.8                  | 369                        | SupplierStandard | 313            |
| 01.G47VPS250G | 25               | 1,960                              | Galvanized | sS       | 613.8                  | 369                        | SupplierStandard | 313            |
| 01.B37VPS250G | 25               | 1,960                              | Bright     | zZ       | 613.8                  | 369                        | SupplierStandard | 313            |
| 01.B47VPS250G | 25               | 1,960                              | Bright     | sS       | 613.8                  | 369                        | SupplierStandard | 313            |
| 01.G37VPS250H | 25               | 2,160                              | Galvanized | zZ       | 639.1                  | 369                        | SupplierStandard | 313            |
| 01.G47VPS250H | 25               | 2,160                              | Galvanized | sS       | 639.1                  | 369                        | SupplierStandard | 313            |
| 01.B37VPS250H | 25               | 2,160                              | Bright     | zZ       | 639.1                  | 369                        | SupplierStandard | 313            |
| 01.B47VPS250H | 25               | 2,160                              | Bright     | sS       | 639.1                  | 369                        | SupplierStandard | 313            |
| 01.G37VPS254G | 25.4             | 1,960                              | Galvanized | zZ       | 633.6                  | 381                        | SupplierStandard | 323            |
| 01.G47VPS254G | 25.4             | 1,960                              | Galvanized | sS       | 633.6                  | 381                        | SupplierStandard | 323            |
| 01.B37VPS254G | 25.4             | 1,960                              | Bright     | zZ       | 633.6                  | 381                        | SupplierStandard | 323            |
| 01.B47VPS254G | 25.4             | 1,960                              | Bright     | sS       | 633.6                  | 381                        | SupplierStandard | 323            |
| 01.G37VPS254H | 25.4             | 2,160                              | Galvanized | zZ       | 659.7                  | 381                        | SupplierStandard | 323            |
| 01.G47VPS254H | 25.4             | 2,160                              | Galvanized | sS       | 659.7                  | 381                        | SupplierStandard | 323            |
| 01.B37VPS254H | 25.4             | 2,160                              | Bright     | zZ       | 659.7                  | 381                        | SupplierStandard | 323            |
| 01.B47VPS254H | 25.4             | 2,160                              | Bright     | sS       | 659.7                  | 381                        | SupplierStandard | 323            |
| 01.G37VPS260G | 26               | 1,960                              | Galvanized | zZ       | 663.9                  | 399                        | SupplierStandard | 339            |
| 01.G47VPS260G | 26               | 1,960                              | Galvanized | sS       | 663.9                  | 399                        | SupplierStandard | 339            |
| 01.B37VPS260G | 26               | 1,960                              | Bright     | zZ       | 663.9                  | 399                        | SupplierStandard | 339            |
| 01.B47VPS260G | 26               | 1,960                              | Bright     | sS       | 663.9                  | 399                        | SupplierStandard | 339            |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.G37VPS260H | 26               | 2,160                              | Galvanized | zZ       | 691.3                  | 399                        | SupplierStandard | 339            |
| 01.G47VPS260H | 26               | 2,160                              | Galvanized | sS       | 691.3                  | 399                        | SupplierStandard | 339            |
| 01.B37VPS260H | 26               | 2,160                              | Bright     | zZ       | 691.3                  | 399                        | SupplierStandard | 339            |
| 01.B47VPS260H | 26               | 2,160                              | Bright     | sS       | 691.3                  | 399                        | SupplierStandard | 339            |
| 01.G37VPS270G | 27               | 1,960                              | Galvanized | zZ       | 715.9                  | 430                        | SupplierStandard | 365            |
| 01.G47VPS270G | 27               | 1,960                              | Galvanized | sS       | 715.9                  | 430                        | SupplierStandard | 365            |
| 01.B37VPS270G | 27               | 1,960                              | Bright     | zZ       | 715.9                  | 430                        | SupplierStandard | 365            |
| 01.B47VPS270G | 27               | 1,960                              | Bright     | sS       | 715.9                  | 430                        | SupplierStandard | 365            |
| 01.G37VPS270H | 27               | 2,160                              | Galvanized | zZ       | 745.5                  | 430                        | SupplierStandard | 365            |
| 01.G47VPS270H | 27               | 2,160                              | Galvanized | sS       | 745.5                  | 430                        | SupplierStandard | 365            |
| 01.B37VPS270H | 27               | 2,160                              | Bright     | zZ       | 745.5                  | 430                        | SupplierStandard | 365            |
| 01.B47VPS270H | 27               | 2,160                              | Bright     | sS       | 745.5                  | 430                        | SupplierStandard | 365            |
| 01.G37VPS280G | 28               | 1,960                              | Galvanized | zZ       | 770                    | 463                        | SupplierStandard | 393            |
| 01.G47VPS280G | 28               | 1,960                              | Galvanized | sS       | 770                    | 463                        | SupplierStandard | 393            |
| 01.B37VPS280G | 28               | 1,960                              | Bright     | zZ       | 770                    | 463                        | SupplierStandard | 393            |
| 01.B47VPS280G | 28               | 1,960                              | Bright     | sS       | 770                    | 463                        | SupplierStandard | 393            |
| 01.G37VPS280H | 28               | 2,160                              | Galvanized | zZ       | 801.7                  | 463                        | SupplierStandard | 393            |
| 01.G47VPS280H | 28               | 2,160                              | Galvanized | sS       | 801.7                  | 463                        | SupplierStandard | 393            |
| 01.B37VPS280H | 28               | 2,160                              | Bright     | zZ       | 801.7                  | 463                        | SupplierStandard | 393            |
| 01.B47VPS280H | 28               | 2,160                              | Bright     | sS       | 801.7                  | 463                        | SupplierStandard | 393            |
| 01.G37VPS286G | 28.6             | 1,960                              | Galvanized | zZ       | 803.3                  | 483                        | SupplierStandard | 410            |
| 01.G47VPS286G | 28.6             | 1,960                              | Galvanized | sS       | 803.3                  | 483                        | SupplierStandard | 410            |
| 01.B37VPS286G | 28.6             | 1,960                              | Bright     | zZ       | 803.3                  | 483                        | SupplierStandard | 410            |
| 01.B47VPS286G | 28.6             | 1,960                              | Bright     | sS       | 803.3                  | 483                        | SupplierStandard | 410            |
| 01.G37VPS286H | 28.6             | 2,160                              | Galvanized | zZ       | 836.5                  | 483                        | SupplierStandard | 410            |
| 01.G47VPS286H | 28.6             | 2,160                              | Galvanized | sS       | 836.5                  | 483                        | SupplierStandard | 410            |
| 01.B37VPS286H | 28.6             | 2,160                              | Bright     | zZ       | 836.5                  | 483                        | SupplierStandard | 410            |
| 01.B47VPS286H | 28.6             | 2,160                              | Bright     | sS       | 836.5                  | 483                        | SupplierStandard | 410            |
| 01.G37VPS290G | 29               | 1,960                              | Galvanized | zZ       | 825.9                  | 497                        | SupplierStandard | 421            |
| 01.G47VPS290G | 29               | 1,960                              | Galvanized | sS       | 825.9                  | 497                        | SupplierStandard | 421            |
| 01.B37VPS290G | 29               | 1,960                              | Bright     | zZ       | 825.9                  | 497                        | SupplierStandard | 421            |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.B47VPS290G | 29               | 1,960                              | Bright     | sS       | 825.9                  | 497                        | SupplierStandard | 421            |
| 01.G37VPS290H | 29               | 2,160                              | Galvanized | zZ       | 860                    | 497                        | SupplierStandard | 421            |
| 01.G47VPS290H | 29               | 2,160                              | Galvanized | sS       | 860                    | 497                        | SupplierStandard | 421            |
| 01.B37VPS290H | 29               | 2,160                              | Bright     | zZ       | 860                    | 497                        | SupplierStandard | 421            |
| 01.B47VPS290H | 29               | 2,160                              | Bright     | sS       | 860                    | 497                        | SupplierStandard | 421            |
| 01.G37VPS300G | 30               | 1,960                              | Galvanized | zZ       | 883.9                  | 532                        | SupplierStandard | 451            |
| 01.G47VPS300G | 30               | 1,960                              | Galvanized | sS       | 883.9                  | 532                        | SupplierStandard | 451            |
| 01.B37VPS300G | 30               | 1,960                              | Bright     | zZ       | 883.9                  | 532                        | SupplierStandard | 451            |
| 01.B47VPS300G | 30               | 1,960                              | Bright     | sS       | 883.9                  | 532                        | SupplierStandard | 451            |
| 01.G37VPS300H | 30               | 2,160                              | Galvanized | zZ       | 920.4                  | 532                        | SupplierStandard | 451            |
| 01.G47VPS300H | 30               | 2,160                              | Galvanized | sS       | 920.4                  | 532                        | SupplierStandard | 451            |
| 01.B37VPS300H | 30               | 2,160                              | Bright     | zZ       | 920.4                  | 532                        | SupplierStandard | 451            |
| 01.B47VPS300H | 30               | 2,160                              | Bright     | sS       | 920.4                  | 532                        | SupplierStandard | 451            |
| 01.G37VPS310G | 31               | 1,960                              | Galvanized | zZ       | 943.8                  | 568                        | SupplierStandard | 482            |
| 01.G47VPS310G | 31               | 1,960                              | Galvanized | sS       | 943.8                  | 568                        | SupplierStandard | 482            |
| 01.B37VPS310G | 31               | 1,960                              | Bright     | zZ       | 943.8                  | 568                        | SupplierStandard | 482            |
| 01.B47VPS310G | 31               | 1,960                              | Bright     | sS       | 943.8                  | 568                        | SupplierStandard | 482            |
| 01.G37VPS310H | 31               | 2,160                              | Galvanized | zZ       | 982.7                  | 568                        | SupplierStandard | 482            |
| 01.G47VPS310H | 31               | 2,160                              | Galvanized | sS       | 982.7                  | 568                        | SupplierStandard | 482            |
| 01.B37VPS310H | 31               | 2,160                              | Bright     | zZ       | 982.7                  | 568                        | SupplierStandard | 482            |
| 01.B47VPS310H | 31               | 2,160                              | Bright     | sS       | 982.7                  | 568                        | SupplierStandard | 482            |
| 01.G37VPS320G | 32               | 1,960                              | Galvanized | zZ       | 1,005                  | 597                        | SupplierStandard | 513.1          |
| 01.G47VPS320G | 32               | 1,960                              | Galvanized | sS       | 1,005                  | 597                        | SupplierStandard | 513.1          |
| 01.B37VPS320G | 32               | 1,960                              | Bright     | zZ       | 1,005                  | 597                        | SupplierStandard | 513.1          |
| 01.B47VPS320G | 32               | 1,960                              | Bright     | sS       | 1,005                  | 597                        | SupplierStandard | 513.1          |
| 01.G37VPS320H | 32               | 2,160                              | Galvanized | zZ       | 1,047                  | 597                        | SupplierStandard | 513.1          |
| 01.G47VPS320H | 32               | 2,160                              | Galvanized | sS       | 1,047                  | 597                        | SupplierStandard | 513.1          |
| 01.B37VPS320H | 32               | 2,160                              | Bright     | zZ       | 1,047                  | 597                        | SupplierStandard | 513.1          |
| 01.B47VPS320H | 32               | 2,160                              | Bright     | sS       | 1,047                  | 597                        | SupplierStandard | 513.1          |
| 01.G37VPS330G | 33               | 1,960                              | Galvanized | zZ       | 1,069                  | 635                        | SupplierStandard | 545.7          |
| 01.G47VPS330G | 33               | 1,960                              | Galvanized | sS       | 1,069                  | 635                        | SupplierStandard | 545.7          |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.B37VPS330G | 33               | 1,960                              | Bright     | zZ       | 1,069                  | 635                        | SupplierStandard | 545.7          |
| 01.B47VPS330G | 33               | 1,960                              | Bright     | sS       | 1,069                  | 635                        | SupplierStandard | 545.7          |
| 01.G37VPS330H | 33               | 2,160                              | Galvanized | zZ       | 1,114                  | 635                        | SupplierStandard | 545.7          |
| 01.G47VPS330H | 33               | 2,160                              | Galvanized | sS       | 1,114                  | 635                        | SupplierStandard | 545.7          |
| 01.B37VPS330H | 33               | 2,160                              | Bright     | zZ       | 1,114                  | 635                        | SupplierStandard | 545.7          |
| 01.B47VPS330H | 33               | 2,160                              | Bright     | sS       | 1,114                  | 635                        | SupplierStandard | 545.7          |
| 01.G37VPS340G | 34               | 1,960                              | Galvanized | zZ       | 1,135                  | 674                        | SupplierStandard | 579.2          |
| 01.G47VPS340G | 34               | 1,960                              | Galvanized | sS       | 1,135                  | 674                        | SupplierStandard | 579.2          |
| 01.B37VPS340G | 34               | 1,960                              | Bright     | zZ       | 1,135                  | 674                        | SupplierStandard | 579.2          |
| 01.B47VPS340G | 34               | 1,960                              | Bright     | sS       | 1,135                  | 674                        | SupplierStandard | 579.2          |
| 01.G37VPS340H | 34               | 2,160                              | Galvanized | zZ       | 1,182                  | 674                        | SupplierStandard | 579.2          |
| 01.G47VPS340H | 34               | 2,160                              | Galvanized | sS       | 1,182                  | 674                        | SupplierStandard | 579.2          |
| 01.B37VPS340H | 34               | 2,160                              | Bright     | zZ       | 1,182                  | 674                        | SupplierStandard | 579.2          |
| 01.B47VPS340H | 34               | 2,160                              | Bright     | sS       | 1,182                  | 674                        | SupplierStandard | 579.2          |
| 01.G37VPS350G | 35               | 1,960                              | Galvanized | zZ       | 1,203                  | 714                        | SupplierStandard | 613.8          |
| 01.G47VPS350G | 35               | 1,960                              | Galvanized | sS       | 1,203                  | 714                        | SupplierStandard | 613.8          |
| 01.B37VPS350G | 35               | 1,960                              | Bright     | zZ       | 1,203                  | 714                        | SupplierStandard | 613.8          |
| 01.B47VPS350G | 35               | 1,960                              | Bright     | sS       | 1,203                  | 714                        | SupplierStandard | 613.8          |
| 01.G37VPS350H | 35               | 2,160                              | Galvanized | zZ       | 1,253                  | 714                        | SupplierStandard | 613.8          |
| 01.G47VPS350H | 35               | 2,160                              | Galvanized | sS       | 1,253                  | 714                        | SupplierStandard | 613.8          |
| 01.B37VPS350H | 35               | 2,160                              | Bright     | zZ       | 1,253                  | 714                        | SupplierStandard | 613.8          |
| 01.B47VPS350H | 35               | 2,160                              | Bright     | sS       | 1,253                  | 714                        | SupplierStandard | 613.8          |
| 01.G37VPS360G | 36               | 1,960                              | Galvanized | zZ       | 1,273                  | 755                        | SupplierStandard | 649.4          |
| 01.G47VPS360G | 36               | 1,960                              | Galvanized | sS       | 1,273                  | 755                        | SupplierStandard | 649.4          |
| 01.B37VPS360G | 36               | 1,960                              | Bright     | zZ       | 1,273                  | 755                        | SupplierStandard | 649.4          |
| 01.B47VPS360G | 36               | 1,960                              | Bright     | sS       | 1,273                  | 755                        | SupplierStandard | 649.4          |
| 01.G37VPS360H | 36               | 2,160                              | Galvanized | zZ       | 1,325                  | 755                        | SupplierStandard | 649.4          |
| 01.G47VPS360H | 36               | 2,160                              | Galvanized | sS       | 1,325                  | 755                        | SupplierStandard | 649.4          |
| 01.B37VPS360H | 36               | 2,160                              | Bright     | zZ       | 1,325                  | 755                        | SupplierStandard | 649.4          |
| 01.B47VPS360H | 36               | 2,160                              | Bright     | sS       | 1,325                  | 755                        | SupplierStandard | 649.4          |
| 01.G37VPS380G | 38               | 1,960                              | Galvanized | zZ       | 1,418                  | 841                        | SupplierStandard | 723.5          |

## Steel Wire Rope verotop S

### Technical data

| Part code     | Rope diameter mm | Tensile strength N/mm <sup>2</sup> | Finish     | Rope lay | Min. breaking force kN | Steel area mm <sup>2</sup> | Lubrication      | Weight kg/100m |
|---------------|------------------|------------------------------------|------------|----------|------------------------|----------------------------|------------------|----------------|
| 01.G47VPS380G | 38               | 1,960                              | Galvanized | sS       | 1,418                  | 841                        | SupplierStandard | 723.5          |
| 01.B37VPS380G | 38               | 1,960                              | Bright     | zZ       | 1,418                  | 841                        | SupplierStandard | 723.5          |
| 01.B47VPS380G | 38               | 1,960                              | Bright     | sS       | 1,418                  | 841                        | SupplierStandard | 723.5          |
| 01.G37VPS380H | 38               | 2,160                              | Galvanized | zZ       | 1,477                  | 841                        | SupplierStandard | 723.5          |
| 01.G47VPS380H | 38               | 2,160                              | Galvanized | sS       | 1,477                  | 841                        | SupplierStandard | 723.5          |
| 01.B37VPS380H | 38               | 2,160                              | Bright     | zZ       | 1,477                  | 841                        | SupplierStandard | 723.5          |
| 01.B47VPS380H | 38               | 2,160                              | Bright     | sS       | 1,477                  | 841                        | SupplierStandard | 723.5          |
| 01.G37VPS400G | 40               | 1,960                              | Galvanized | zZ       | 1,571                  | 932                        | SupplierStandard | 801.7          |
| 01.G47VPS400G | 40               | 1,960                              | Galvanized | sS       | 1,571                  | 932                        | SupplierStandard | 801.7          |
| 01.B37VPS400G | 40               | 1,960                              | Bright     | zZ       | 1,571                  | 932                        | SupplierStandard | 801.7          |
| 01.B47VPS400G | 40               | 1,960                              | Bright     | sS       | 1,571                  | 932                        | SupplierStandard | 801.7          |
| 01.G37VPS400H | 40               | 2,160                              | Galvanized | zZ       | 1,636                  | 932                        | SupplierStandard | 801.7          |
| 01.G47VPS400H | 40               | 2,160                              | Galvanized | sS       | 1,636                  | 932                        | SupplierStandard | 801.7          |
| 01.B37VPS400H | 40               | 2,160                              | Bright     | zZ       | 1,636                  | 932                        | SupplierStandard | 801.7          |
| 01.B47VPS400H | 40               | 2,160                              | Bright     | sS       | 1,636                  | 932                        | SupplierStandard | 801.7          |