Weld-on Lifting Ring RUD VRBK-FIX

Product information

Load ring for edge attachments. Welded on the corner reduces the number of lifting points. Loadable in any direction. Low profile and 270º pivoting.

... *Read more*

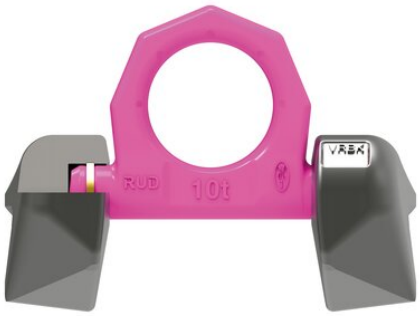

Material: CrNiMo Steel
Marking: According to standard
Temperature range: -20° to +200°C.
Finish: Pink powder coated.
Standard: EN 1677-1

Safety factor: 4:1.

Forankra Polska
office@forankra.pl
+48 91 418 25 91

© November 2026 - All Rights Reserved

Forankra
Zabezpieczamy wszystko w transporcie™

Weld-on Lifting Ring RUD VRBK-FIX

Blueprint



Technical data

Part code	Code	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	T mm	Weight kg
11.427902149	VRBK-FIX 4 t	4	32	14	28	48	141	30	65	1
11.427902150	VRBK-FIX 6.7 t	6.7	40	20	35	60	181	34	84	2.16
11.427902256	VRBK-FIX 10 t	10	52	22	46	65	212	46	94	4.4
11.427904653	VRBK-50 t	50	134	70	118	230	626	96	303	76.35

Forankra Polska
office@forankra.pl
+48 91 418 25 91

© November 2026 - All Rights Reserved